

Self-aligning pads with O-ring and exchangeable inserts, Form M, flattened ball with carbide diamond grip

Item description/product images



Description

Material:

Body carbon steel.

Ball rust and acid resistant steel.

Insert:

Form M tool steel with carbide serrations.

Version:

Body tempered, black oxidised.

Ball hardened, bright.

Insert:

Form M black oxidised.

Note:

Self-aligning pads are used to support and clamp unmachined and machined workpieces.

They can also be used as stops, supports and thrust pads in fixtures and toolmaking.

The ball can be removed from the housing by applying light pressure to the socket head screw.

Ball secured against rotation.


Advantages:

Highly cost-effective as inserts can be exchanged.

The built-in O-ring holds the ball in place and keeps dirt and foreign particles out, ensuring uniform movement.

Self-aligning pads with O-ring and exchangeable inserts, Form M, flattened ball with carbide diamond grip

Drawings

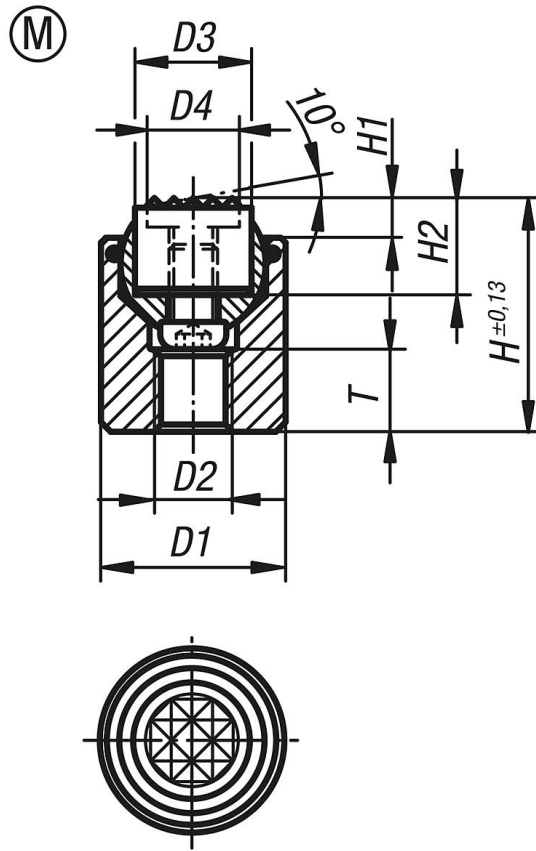

Overview of items

Order No.	Form	D1	D2	D3	D4	H	H1	H2	T	Ball-Ø	Load rating max. kN (static load only)	Order No. gripper
K0285.917X022	M	17	M6	10	7,9	22	4	10	7	13	28	K0385.10107
K0285.919X024	M	19	M8	12	9,5	24	4	10	8	15	39	K0385.12107
K0285.924X028	M	24	M10	16	12,7	28	4	10	8	20	58	K0385.16107
K0285.930X030	M	30	M12	20	15,9	30	4	10	9	23	95	K0385.20107
K0285.936X036	M	36	M12	25	19	36	4	10	11	28	136	K0385.25107